



altro.com

Designed for possibilities.
Made for people.



Altro Transflor Wood



altro

Altro Transflor Wood



500 x 100mm

Oak Traditions TFWSA2213F
WR353 / A1M225 / LRV 25



Design as shown

Spiced Bamboo TFWSA2219F
WR342 / A1M224 / LRV 21



1000 (550/450) x 100mm

Urban Cherry TFWSA2203F
WR337 / A1M337 / LRV 17



1000 x 125mm

Tudor Oak TFWSA2223F
WR471 / A1M337 / LRV 16

Codes: WR = weld rod, A1M = mastic, LRV = light reflectance value

Abkürzungen: WR = Schweißschnüre, A1M = Altro mastic Dichtmasse, LRV = Lichtreflexionsgrad

Códigos: WR = Cordón de soldadura, A1M = Mástique, LRV = Valor de reflectancia de la Luz



1 000 (550/450) x 100mm

Seasoned Cherry TFWSA2209F
WR343 / A1M246 / LRV 15



1 000 (550/450) x 100mm

Antique Walnut TFWSA2207F
WR341 / A1M160 / LRV 15



500 x 100mm

Oak Riche TFWSA2214F
WR227 / A1M227 / LRV 10



500 x 100mm

Century Oak TFWSA2212F
WR346 / A1M62 / LRV 8

Light reflectance values measured in accordance with BS 8493:2008.
Lichtreflexionsgrad (LRV) gemäß BS 8493:2008.
Los Valores de Reflectancia de la luz se miden de acuerdo con BS 8493:2008.



1 000 (550/450) x 100mm

Vintage Cherry TFWSA2202F
WR336 / A1M239 / LRV 22



1 000 x 125mm

Jacobean Oak TFWSA2222F
WR470 / A1M83 / LRV 11



500 x 100mm


Manor Oak TFWSA2216F
WR348 / A1M348 / LRV 7



Design as shown

Iron Bamboo TFWSA2226F
WR232 / A1M100 / LRV 14

Exact material match with samples cannot be guaranteed.
Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.
Las muestras no pueden garantizar un color exacto.

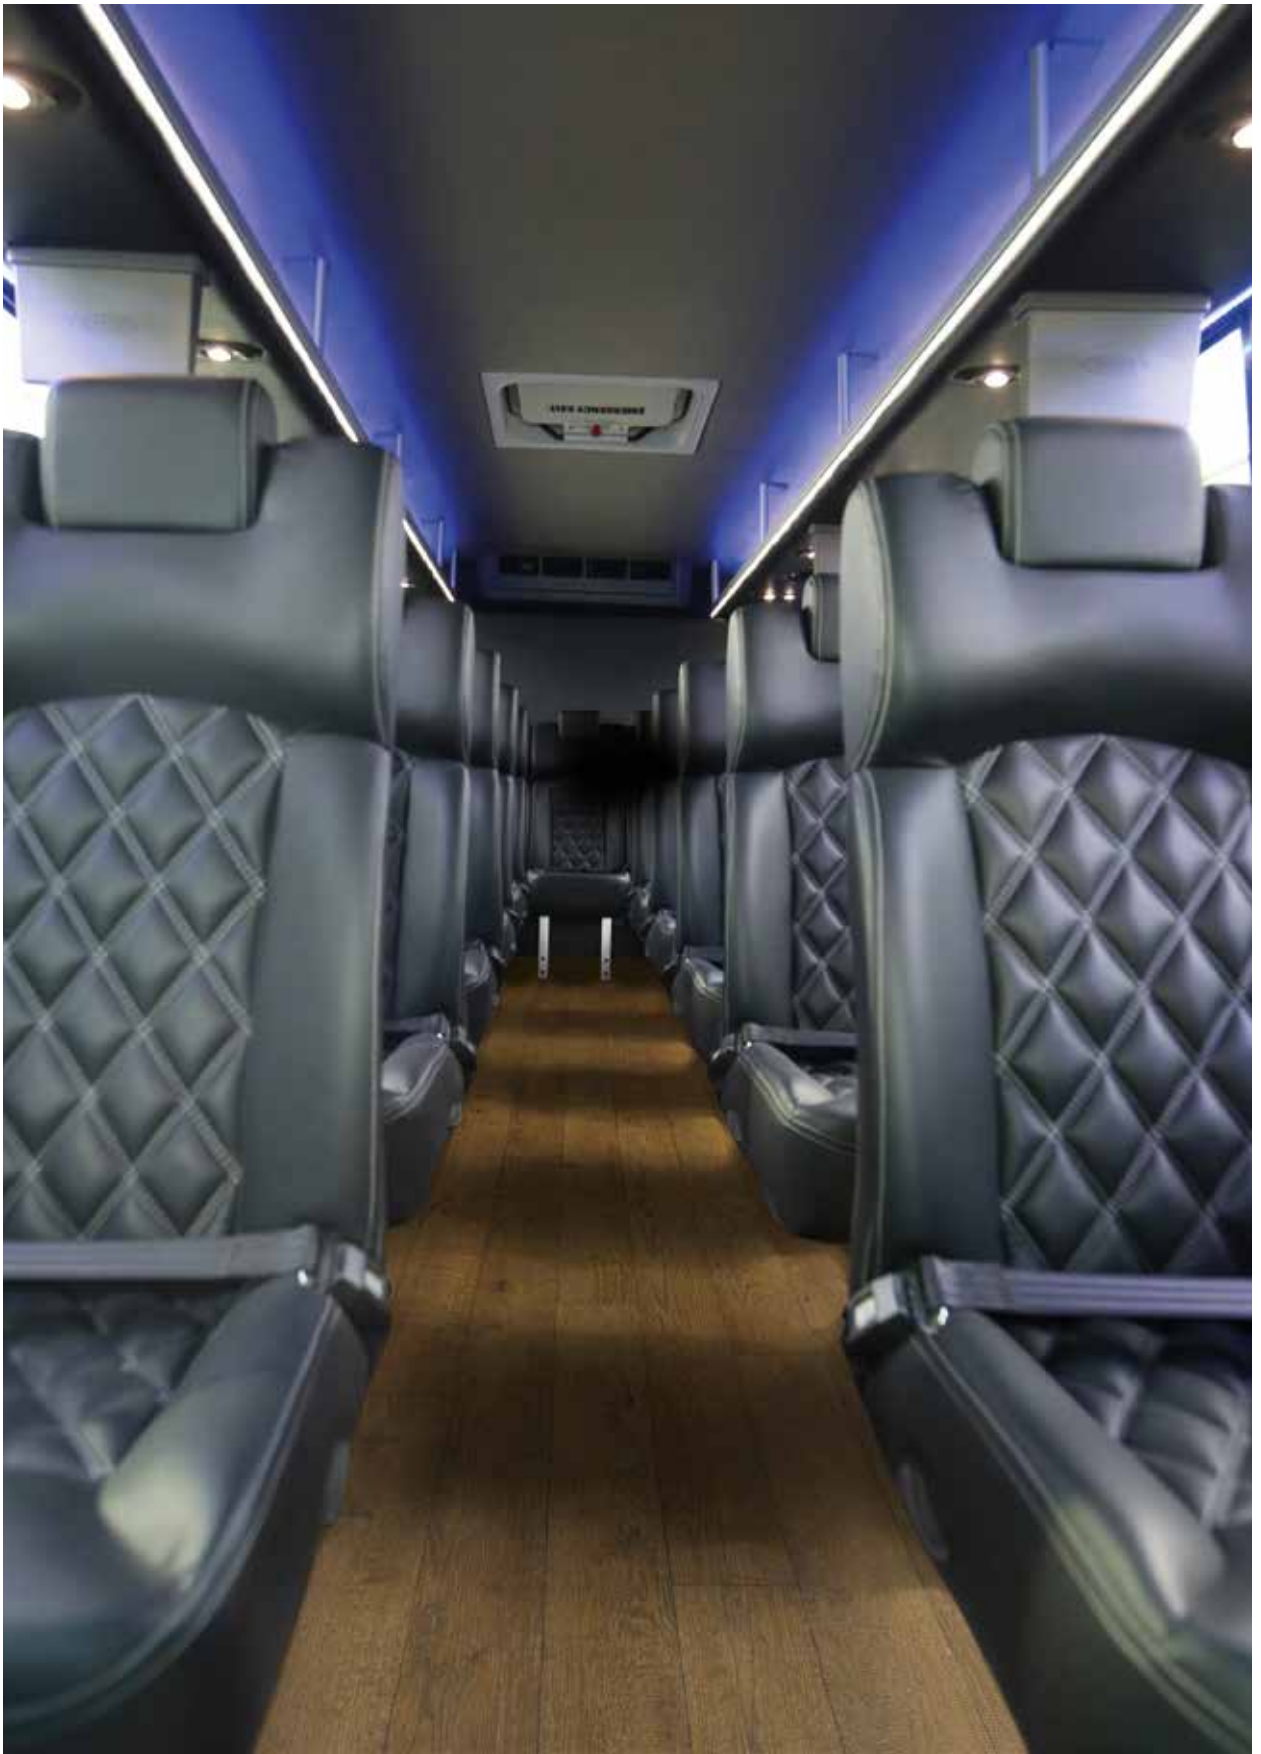

All floors are available in a self-adhesive option and pre-cut kits. Please contact us for more information.

Alle Bodenbeläge sind als selbstklebende Option erhältlich oder vorgeschnitten. Für weitere Informationen sprechen Sie uns bitte an.

Todos los suelos están disponibles en una opción autoadhesiva y con kits pre-cortados. Por favor contáctenos para más información.
















Typical applications / Typische Anwendungsbereiche / Zonas de instalación recomendadas

Executive coaches, high-end vehicles.

Luxus Reisebusse, High-End-Fahrzeuge.

Autocares para ejecutivos, Vehículos de lujo.

Technical information / Technische Informationen / Información técnica

	Flooring type	Belagsart	Tipo de pavimento	EN 13845 ASTM F1303	Safety flooring Suelo de Antideslizante Sicherheitsbodenbelag
	Slip resistance	Rutschhemmung/-sicherheit	Resistencia al deslizamiento	BAM EN 13893 EN 13845 ASTM D2047 PTV DIN 51130	Dry - very slip resistant muy antideslizante stark rutschhemmend Wet - slip resistant antideslizante rutschhemmend DS ESf ≥ 0.6 ≥ 36 R10
	Thickness	Gesamtdicke	Espesor total	EN ISO 24346	2.2 mm / 0.088"
	Wear layer	Nutzschichtdicke	Capa de uso	EN ISO 24340	0.7 mm / 0.027"
	Flexibility	Flexibilität	Flexibilidad	EN ISO 24344 ASTM F1303	Pass / Conforme / Bestanden
	Dimensional Stability	Formstabilität	Estabilidad dimensional	EN ISO 23999	≤ 0.4%
	Weight	Flächengewicht	Peso	EN ISO 23997	2.68 kg/m ² / 4.93lb/sy
	Roll dimensions	Rollenformat	Dimensiones del rollo	EN ISO 24341	2 m x 20 m = 40 m ² 6'7" x 65'7"
	Light fastness	Farbbeständigkeit/Lichtechtheit	Resistencia a la luz	EN ISO 105-B02	≥ 6
	Wear resistance	Verschleißgruppe	Abrasión	EN 13845	≤ 10% / 50000 cycles ≤ 10% / 50.000 ciclos ≤ 10% / 50000 Umdrehungen
	Indentation	Resteindruck	Punzonamiento	EN ISO 24343-1 ASTM F970	≤ 0.10 mm
	Fire performance	Brandverhalten	Reacción al fuego	ECE R-118 FMVSS 302 / CMVSS 302	Pass / Conforme / Bestanden Pass / Conforme / Bestanden
	Chemical resistance	Chemikalien-/Fleckenbeständigkeit	Resistencia a los productos químicos	EN ISO 26987	Good / Buena / Gut
	Castor chair abrasion	Stuhllolleneignung	Huellas de sillas de ruedas	EN 425	Pass / Conforme / Bestanden
	Electrical behaviours	Elektrostatisches Verhalten	Características eléctricas	EN 1815	≤ 2 kV Antistatic ≤ 2 kV Antiestáticas ≤ 2 kV Antistatisch



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

Sustainability / Nachhaltigkeit / Sostenibilidad




Installation and maintenance / Verlegung und Pflege / Instalación y mantenimiento

Please refer to Altro installation and maintenance instructions. Failure to follow these instructions can affect product performance. Technical information on installation and staining can be found at www.altro.com

Bitte beachten Sie die Altro Verlege- und Pflegeanleitungen. Erfolgt Verlegung und Pflege des Bodenbelags nicht gemäß Anleitung, kann sich dies auf die Eigenschaften auswirken. Technische Informationen zur Chemikalienbeständigkeit sowie zur Verlegung und Pflege finden Sie unter www.altro.com

Consulte las instrucciones de instalación y mantenimiento de Altro. El no respetar estas instrucciones podría afectar al rendimiento del producto. Para más información sobre mantenimiento o instalación de nuestros productos pincha aquí: www.altroscandess.com

 Altro, Designed for possibilities. Made for people. Altro Transflor Wood and Altro Easyclean Technology are trademarks of Altro Limited.

United Kingdom	+44 (0) 1462 707 700	 transportenquiries@altro.com
United States	+1 800 382 0333	 transport@altrofloors.com
Canada	+1 800 565 4658	 transport@altrofloors.com
Australia	+61 3 9764 5666	 info@asf.com.au
China	+86 (0) 21 62363138	 enquiries@altro.net.cn
Germany	+49 (0) 340 6500 0	 anfrage@altro.de
Spain	+34 91 549 52 30	 suelos@altroscandess.com